

FITTING INSTRUCTIONS


DAB-A1 DAB ANTENNA

Designed for use with Kenwood Digital Radios only

Please Note: This fitting procedure should be conducted by a qualified vehicle technician as air bags maybe installed in the dismantling areas.


Items included:

- Antenna Film – See Picture below
- Antenna Lead with Earth Sheet and Amplifier Block – See Picture below
- 3 x Stick Pads
- 1 x Cleaner Wipe

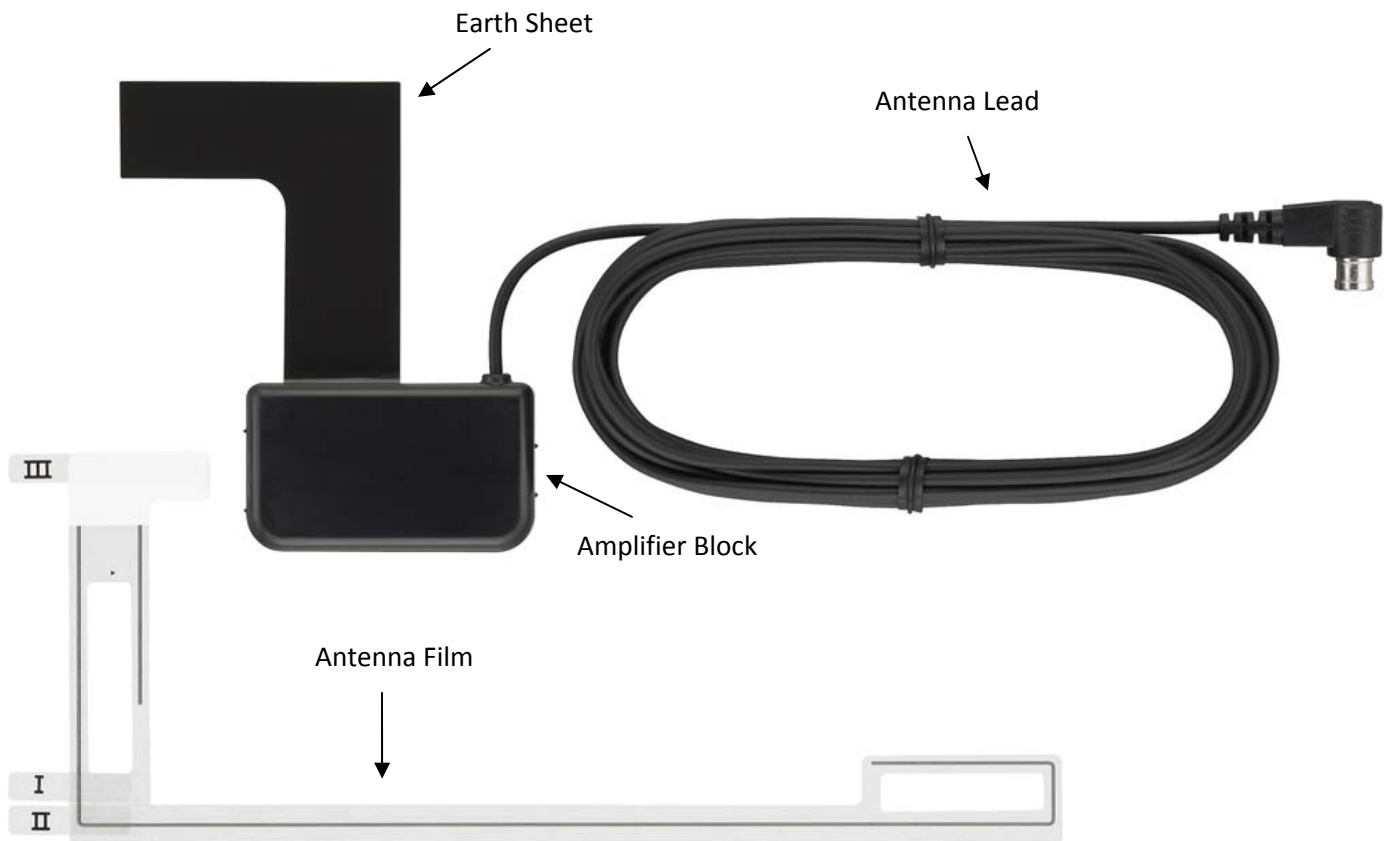

Step 1

Carefully remove the passenger side A Pillar cover.

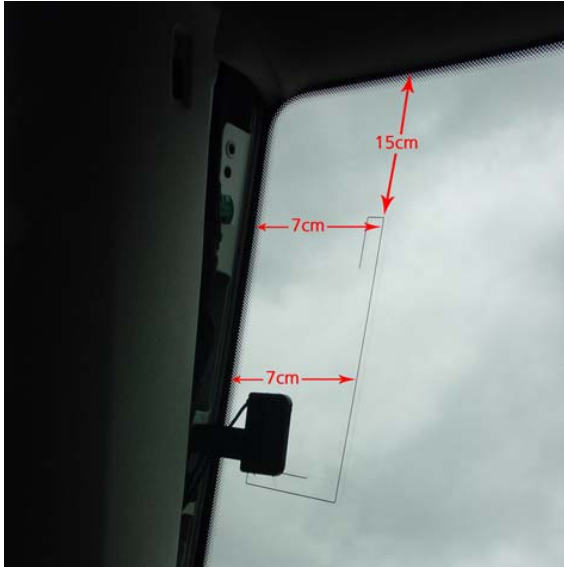


Step 2

The antenna should be located on the passenger side of the front windscreen. Ensure that there is an approximate 15cm gap at the top of the antenna film and a 7cm gap from the side of the windscreen to the vertical strip of the antenna film as shown.

Wipe the inside of the windscreen where the antenna film and the antenna earth and amplifier block is to be located with the cleaner.

Note: If the glass is cold you will need to warm the glass by using the cars heater. This will ensure a good adhesion.

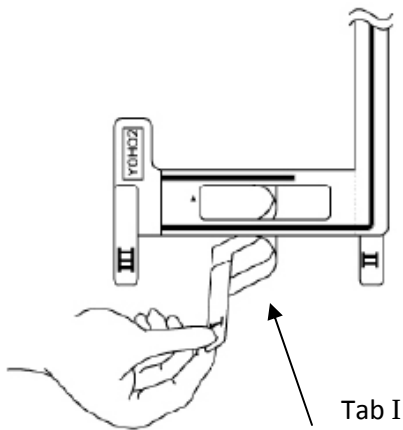


Step 3

Ensure that the glass surface is completely dry before mounting the antenna film.

Remove Tab I on the antenna film and stick the lower horizontal section of the antenna film to the windscreen. Ensure you have left a 15cm gap at the top and 7cm gap to the side.

Note: Remove the backing gently and do not touch the sticky side of the horizontal section of the antenna film

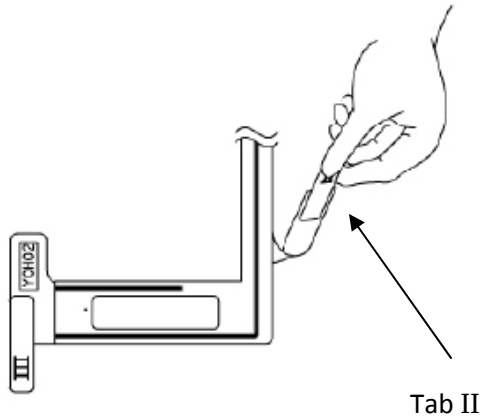


Step 4

Remove the Tab II on the vertical section of the antenna film.



Step 4


Now stick this to the glass while gently applying pressure to remove any air bubbles.

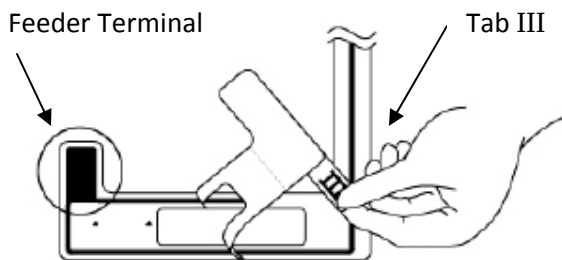

Step 5

Remove Tab III

Note: Do not touch the feeder terminal of the antenna film – This is the blacked out section shown.

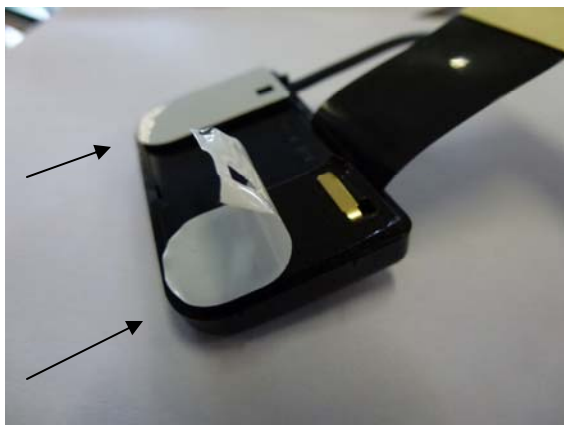

Step 6

Remove the 2 white sticky pad backings from the amplifier block on the antenna lead. Ensuring that you do not touch the terminals or the sticky surface.



Step 7

Match the contact tabs of the amplifier block on the antenna lead with the two black triangles on the antenna film and stick the two parts together.

Note: Do not touch the feeder terminal of the antenna film.



Step 8

Remove the yellow backing from the earth tab on the amplifier block and stick this to the metal of the A pillar.

Note: You **DO NOT** need to remove any paint for the earth contact to work

Step 9

Route the antenna lead down the A pillar into the dashboard to the Kenwood head-unit. Ensure not to trap any leads and cable tie as you go.

Carefully refit the A pillar cover and check for the DAB reception.